



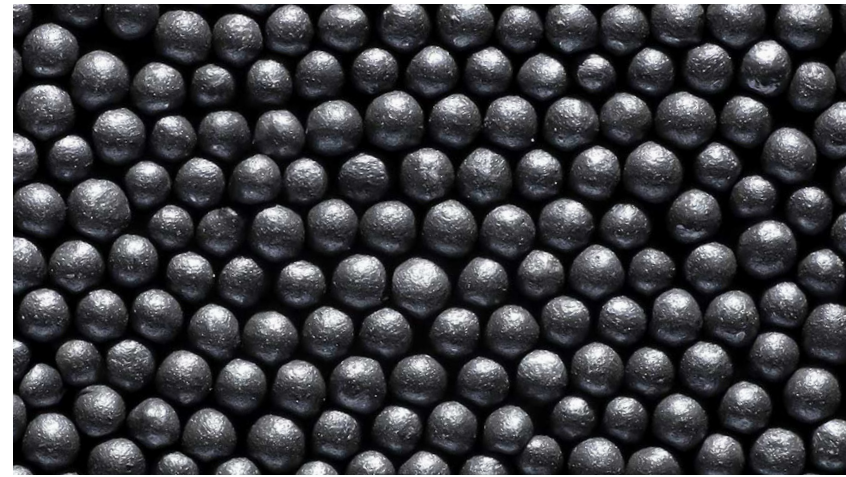

Manufactured under strict conditions and a unique quenching process, you get an abrasive having optimum resilience, low chloride conductivity and high resistance to fatigue. Used primarily in blasting applications, for desanding in foundries to descaling in steel mills, our steel shot will meet your most demanding needs.



With 9 manufacturing plants worldwide, and multiple distribution locations, our steel shot is always available for prompt delivery.

Customized
packing
available
upon request

*Document for informational purposes only. Not contractual. Contact your local representative for latest version of the technical data sheets.

Product	7	8	10	12	14	16	18	20	25	30	35	40	45	50	80	120	200
S780	AP		85% min	97% min													
S660		AP		85% min	97% min												
S550			AP		85% min	97% min											
S460			AP	5% max		85% min	96% min										
S390				AP	5% max		85% min	96% min									
S330					AP	5% max		85% min	96% min								
S280						AP	5% max		85% min	96% min							
S230							AP	10% max		85% min	97% min						
S170								AP	10% max		85% min	97% min					
S110										AP	10% max		80% min	90% min			
S70												AP	10% max		80% min	90% min	
Screen Number	7	8	10	12	14	16	18	20	25	30	35	40	45	50	80	120	200
Screen Size (mm)	2.80	2.36	2.00	1.70	1.40	1.18	1.00	0.85	0.71	0.60	0.50	0.425	0.355	0.30	0.180	0.125	0.075
Screen Size (inches)	0.111	0.0937	0.0787	0.0661	0.0555	0.0469	0.0394	0.0331	0.0278	0.0234	0.0197	0.0165	0.0139	0.0117	0.007	0.0049	0.0029